



CNV600

Gateway VPN

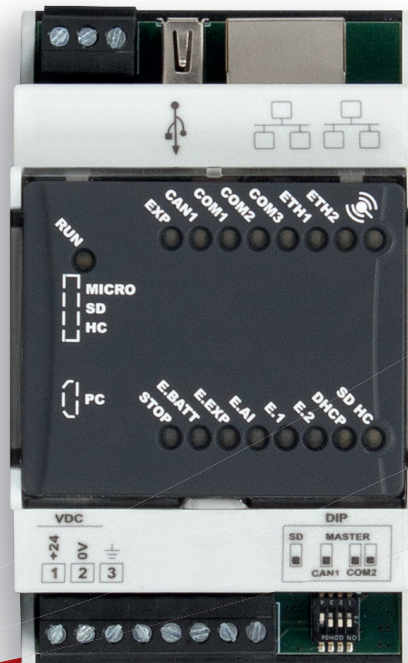

Pixsys Portal VPN – Remote Control and Assistance tool
Dual Ethernet Port – Distinct networks passthrough
Linux environment
Full compliance with third-party devices

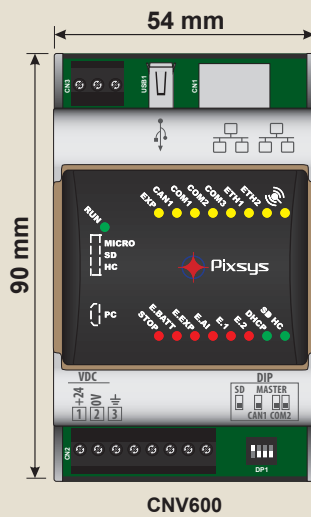

Main features



BOX	DIN43880 - 3x mod. 54x90x64
POWER SUPPLY	12..24 V DC +/- 15%
POWER CONSUMPTION	3 W
OPERATING CONDITIONS	Temperature 0-45 °C, humidity 35..95 RH%
MATERIAL	Noryl V0
WEIGHT	Approx. 250 g
SEALING	IP20 (box and terminal blocks)
TERMINAL BLOCKS	Extractable

CNV600 Technical data (CPU)

PROCESSOR	ARM Cortex A8-1 GHz
MEMORY	Flash 2GB pSLC Tecnology
MEMORY RAM	RAM 512 MB DDR3
ETHERNET	1 port 10/100 Base-T on RJ45
USB TO ETHERNET ADAPTER	1 port 10/100 Base-T on RJ45

Software features

VPN	Pixsys Portal software for VPN connection passthrough
OPERATING SYSTEM	Linux Debian 11

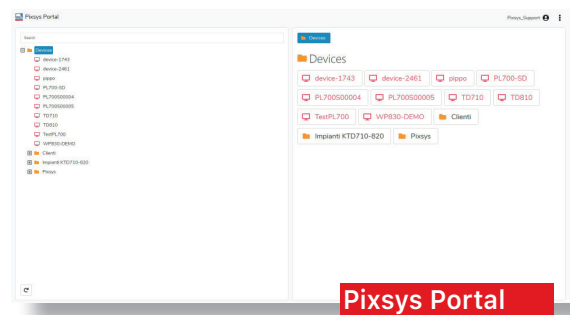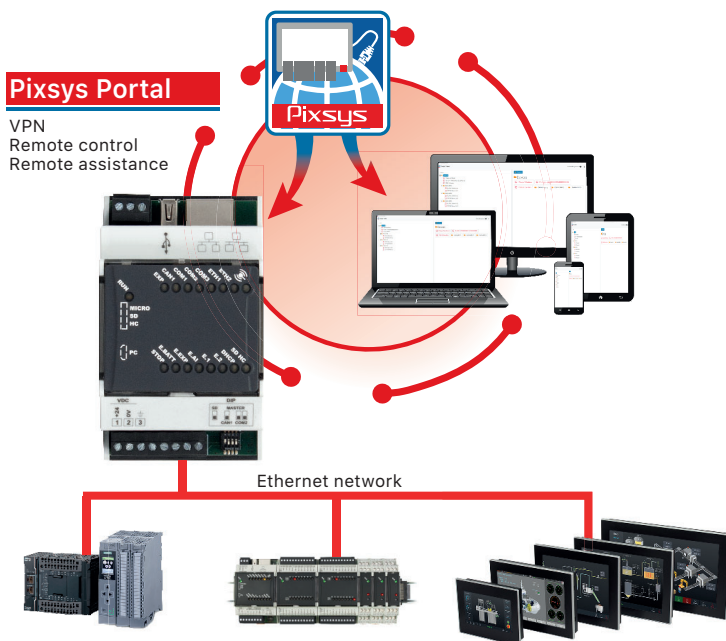

Ordering codes

CNV600-1AD	PLC DIN Rail 1 Ethernet, 1 USB to ETH adapter, 1 PIXSYS PORTAL license
------------	--